




R.P.M. 2850

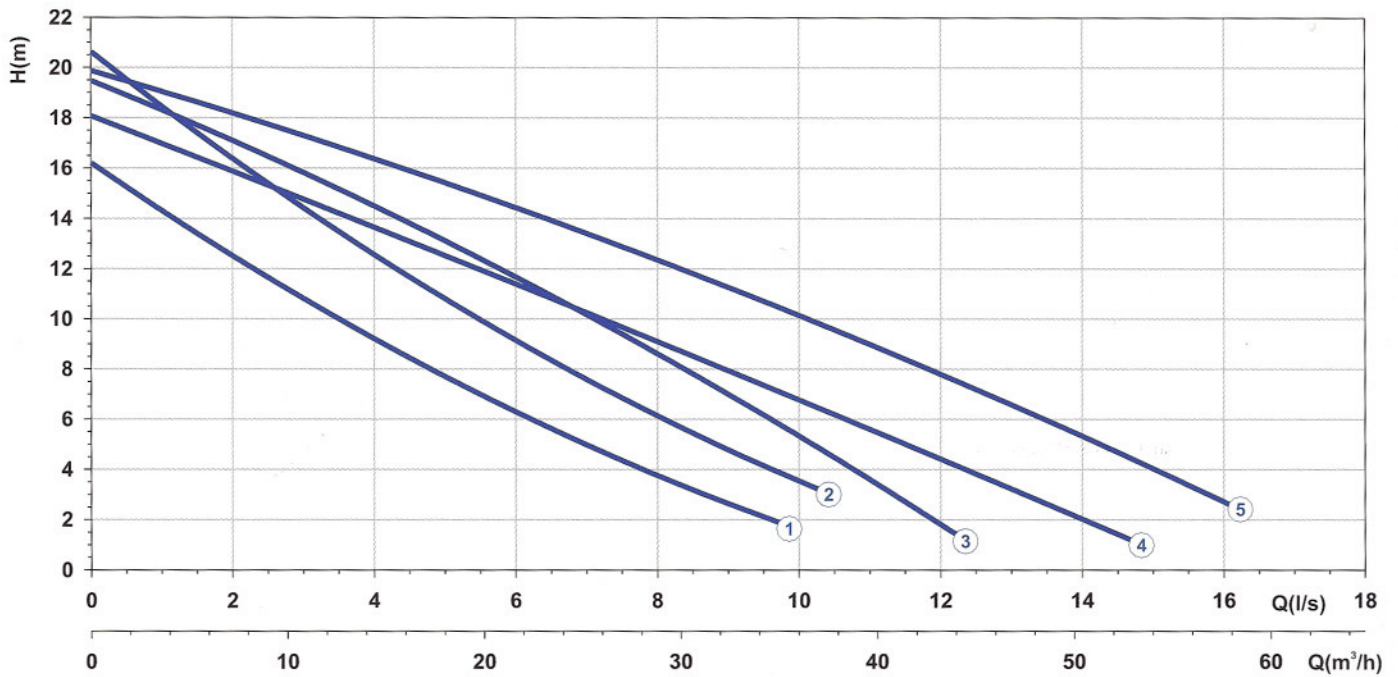

Curve N°	Code	Type	STANDARD MOTOR			Power Supply	DN mm	Free Passage mm	Weight Kg	code	Motor available version
			Nominal Power P2 (kW)	Nominal Current I (A)	Starting Current Is (A)						
1	7000394	G272M1M2-K30AB1	1,1	7,5	21	1ph 230V-50Hz	50	30	31	-	-
	7009016	G272T1M2-K30AA0	1,4	3	8,4	3ph 400V-50Hz	50	30	31	-	-
2	7000602	G272T1M1-K30AA0	1,4	3	8,4	3ph 400V-50Hz	50	30	31	-	-
3	7002282	G271M1M1-L30AB1	1,1	7,5	21	1ph 230V-50Hz	65	30	42	7002812	-
	7002043	G271T1M1-L30AA0	1,4	3,5	14	3ph 400V-50Hz	65	30	42	7009113	-
4	7005372	G271M1M2-L40AB1	1,9	10	31	1ph 230V-50Hz	65	40	45	7005851	-
	7005453	G271T1M2-L40AA0	2,4	5	21	3ph 400V-50Hz	65	40	45	7005757	-
5	7005029	G271T1M1-L40AA0	2,8	6	25,2	3ph 400V-50Hz	65	40	45	7005558	-