





R.P.M. 2850

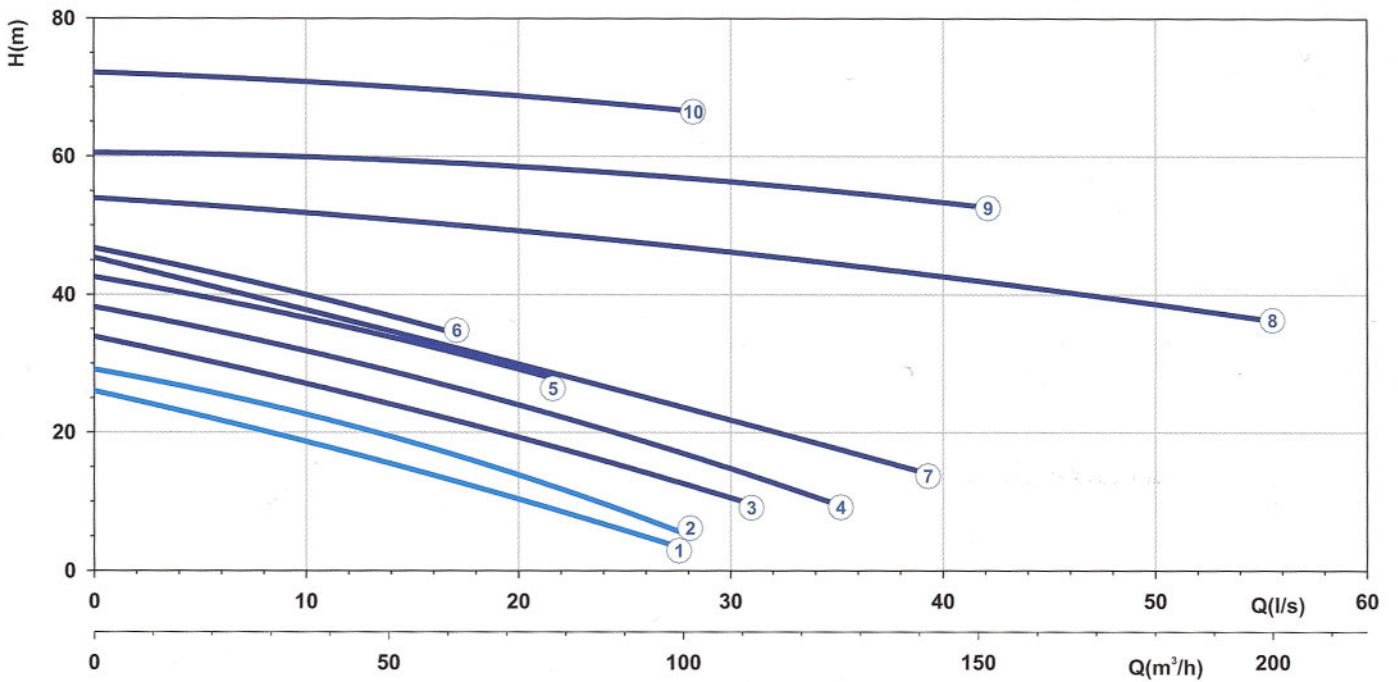

Curve N°	Code	Type	STANDARD MOTOR			Power Supply	DN mm	Free Passage mm	Weight Kg	code 	Motor available version
			Nominal Power P2 (kW)	Nominal Current I (A)	Starting Current Is (A)						
1	7003233	G211R3V2-M70SA2	10	18	106	3ph 400/690V-50Hz	DN 80	70	160	-	IE2
2	7009668	G211R3V1-M70SA2	10	18	106	3ph 400/690V-50Hz	DN 80	70	160	-	IE2
3	7006112	G213R3V5-M80AA2	15	27	156	3ph 400/690V-50Hz	DN 80	80	190	7007472	IE3
4	7006110	G213R3V4-M80AA2	18	34	194	3ph 400/690V-50Hz	DN 80	80	190	7007473	IE3
5	7006429	G213R6V2-M50AA2	18	34	194	3ph 400/690V-50Hz	DN 80	40x50	191	7007398	IE3
6	7006428	G213R6V1-M50AA2	18	34	194	3ph 400/690V-50Hz	DN 80	40x50	196	7007469	IE3
7	7006850	G216R3V1-M80AA2	22	40	237	3ph 400/690V-50Hz	DN 80	80	320	-	IE3
8	7002628	G218R9V4-P80AA2	50	87	506	3ph 400/690V-50Hz	DN 100	80	410	-	IE2
9	7001837	G218R9V3-P80AA2	50	87	506	3ph 400/690V-50Hz	DN 100	80	410	-	IE2
10	7002380	G218R9V2-P80AA2	50	87	506	3ph 400/690V-50Hz	DN 100	80	410	-	IE2